
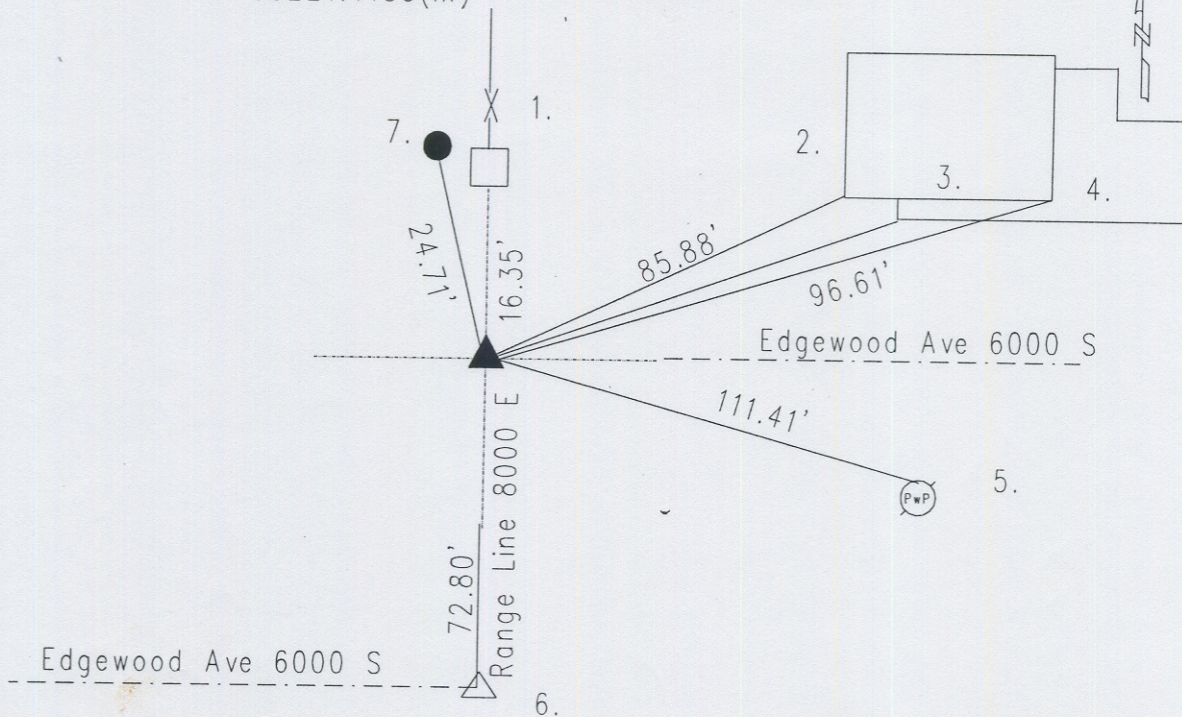


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 7 TOWNSHIP 14 RANGE 5  
DATE: -3-14-01 11-1-07  
PARTY CHIEF: -Wilcoxen- Greene  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 2-29-96

IN. S.P.C. E ZONE, NAD 83  
NAME: 14050701  
N: 492210.1704(m)  
E: 69221.4185(m)

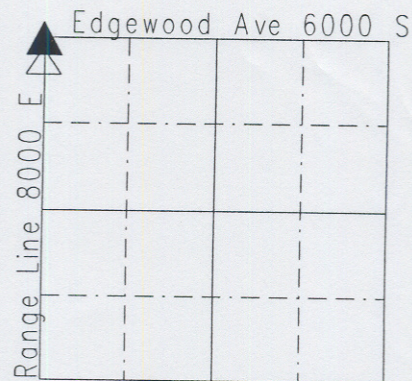

Original post set 1820 by Hendricks with witnesses: 14" beech N 3 W 16 links;  
7" dogwood S 28 E 6 links per Marion County Atlas pg. 13. Hosbrook 11/12-15/1850  
called stone with witnesses: oak stump bearing 48 degrees N and 6 degrees E  
44 links. 7-29-64 Burres called stone. 11-8-74 Fortner called stone. 8-17-79  
Wilcoxen called stone. 5-22-87 Gries called 1/2" iron pin. Excavated 8-12-90  
1/2" iron pin found at surface. Harrison set. As of 4-14-93 HARRISON IS NOT  
THE SECTION CORNER ACCORDING TO RECORDS. There is a stone 0.9' E of  
Harrison and THAT STONE IS THE TRUE CORNER. Re-tied 2-29-96 by Wilcoxen.  
Re-tied 3-14-01 by Wilcoxen.

14050701

REF.	DISTANCE	DESCRIPTION
1.	16.35'	Mag nail w/brass washer SE fence post 10"up
2.	85.88'	SW corner of brick for ADDRESS 8006
3.	78.71'	SW corner patio for ADDRESS 8006
4.	96.61'	SE corner of brick for ADDRESS 8006
5.	111.41'	Mag nail N PwP#97-740 12"up
6.	72.80'	Due S to Harrison : NE 12-14-4
7.	24.71'	1 1/2" threaded pin